

IRDRAWER



COST
REDUCTION



SAVING
TIME



CONTROL



REPORTING



24/7 ACCESS



www.securevend.co.uk

enquiries@securevend.co.uk





IRDRAWER

Innovative **Multifunctional Vending Machine**, adapted to the management of a large number of commodity indexes.




IRDRAWER is a **modern, self-service** vending machine for product distribution. The design, based on a drawer system, offers the possibility of storage of up to **1,792 unique items of different sizes**. Ease of operation is provided by **21" touch screen** with modern and intuitive interface. **Two product loading options** enable even faster and simpler filling the machine. The IRDRAWER has a built-in **RFID reader, barcode and QR code scanner** which supports the **product return function**.

TECHNICAL SPECIFICATIONS	
Height [mm]	1795
Width [mm]	980
Depth [mm]	600
Voltage [V]	230 VAC - 50 Hz
Power usage [W]	5/80
Max. drawer load [kg]	100
Weight [kg]	250
Temp. [°C]	from 5 to 70

IRSYSTEM APPLICATION

- ▶ **24/7 access.**
- ▶ **Drop in the consumption of products by up to 50%.**
- ▶ **Extensive product returns function.**
- ▶ **Very large capacity, 1792 lockers in the machine.**
- ▶ **2 types of drawers** within one machine.
- ▶ **Multiple configurations available.**
- ▶ **21" touch screen** with modern and intuitive interface.
- ▶ **Configuration as required.**
- ▶ **Built-in RFID reader, barcode and QR code scanner.**
- ▶ **Monitoring of current status** via the IRSYSTEM web application.
- ▶ **Modularity** allows to combine devices into sets.

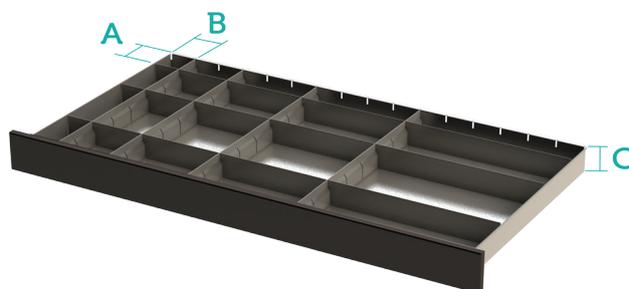

IRSYSTEM APPLICATION

We offer **proprietary IRSYSTEM software** tailored to the individual needs of the customer for each vending machine, which opens up **unlimited possibilities for remote process management**. IRSYSTEM enables **data migration** and fast communication between the server and machine.

- possibility of **integration** with systems such as ERP, GERP, SAP, etc.
- generating of **automatic reports** and orders
- actual **preview of the inventories** available in the machine
- **management of authorisation** of employee access to the vending machine

LOCKER CONFIGURATIONS IN THE DRAWER			
NUMBER OF COMPARTMENTS	A HEIGHT [MM]	B WIDTH [MM]	C DENSITY [MM]
128	57	44	52 or 129
64	57	100	52 or 129
32	116	100	52 or 129
16	116	212	52 or 129
8	116	463	52 or 129
32	233	44	52 or 129
16	233	212	52 or 129
4	233	436	52 or 129
16	468	44	52 or 129
8	468	100	52 or 129
4	468	212	52 or 129
2	468	436	52 or 129

